

### TGS 830 - for the detection of Chlorofluorocarbons (CFC's)

#### Features:

- \* High sensitivity to R-113, R-22, R-11, and R-12
- \* Low sensitivity to hydrogen and alcohol vapors
- \* Uses simple electrical circuit
- \* Ceramic base resistant to severe environment

The sensing element of Figaro gas sensors is a tin dioxide ( $\text{SnO}_2$ ) semiconductor which has low conductivity in clean air. In the presence of a detectable gas, the sensor's conductivity increases depending on the gas concentration in the air. A simple electrical circuit can convert the change in conductivity to an output signal which corresponds to the gas concentration.

The **TGS 830** has high sensitivity to R-22 as well as to R-11, R-12, and R-113. Due to its low sensitivity to hydrogen and alcohol vapors, the sensor can achieve good selectivity. Combined with its long life, this makes TGS 830 an excellent, low-cost sensor for CFC detection.


The figure below represents typical sensitivity characteristics, all data having been gathered at standard test conditions (see reverse side of this sheet). The Y-axis is indicated as *sensor resistance ratio* ( $R_s/R_o$ ) which is defined as follows:

$R_s$  = Sensor resistance of displayed gases at various concentrations

$R_o$  = Sensor resistance at 1000ppm of R-22

#### Applications:

- \* Refrigerant leak detectors

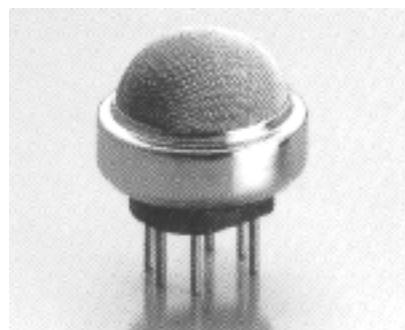


The figure below represents typical temperature and humidity dependency characteristics. Again, the Y-axis is indicated as *sensor resistance ratio* ( $R_s/R_o$ ), defined as follows:


$R_s$  = Sensor resistance at 1000ppm of R-22 at various temperatures/humidities

$R_o$  = Sensor resistance at 1000ppm of R-22 at 20°C and 65% R.H.


#### Sensitivity Characteristics:

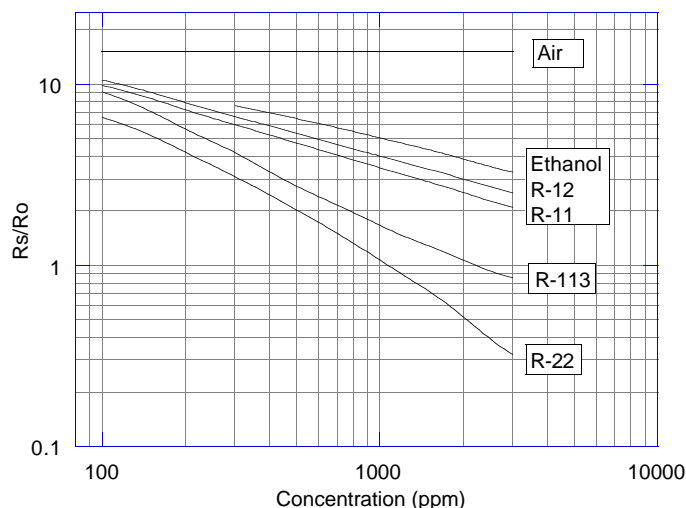

#### Temperature/Humidity Dependency:

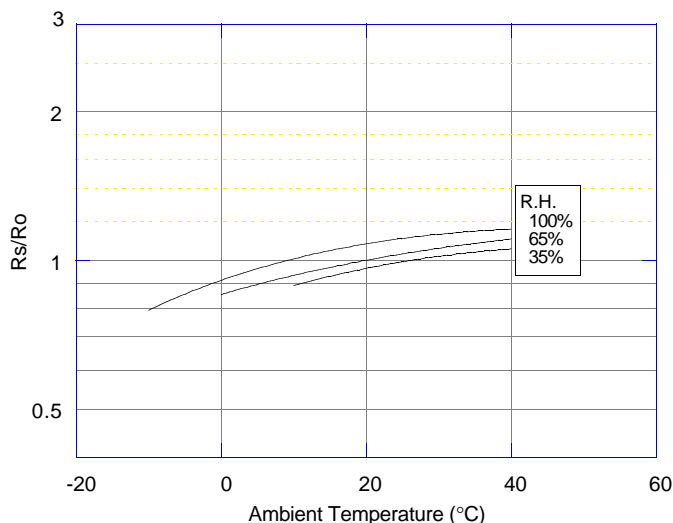

### Structure and Dimensions:

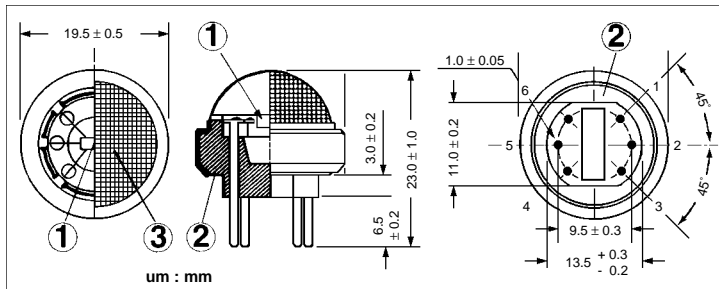

#### ① Sensing Element:

SnO<sub>2</sub> is sintered to form a thick film on the surface of an alumina ceramic tube which contains an internal heater.

#### ② Sensor Base:

Alumina ceramic


#### ③ Flame Arrestor:

100 mesh SUS 316 double gauze

### Pin Connection and Basic Measuring Circuit:

The numbers shown around the sensor symbol in the circuit diagram at the right correspond with the pin numbers shown in the sensor's structure drawing (above). When the sensor is connected as shown in the basic circuit, output across the Load Resistor ( $V_{RL}$ ) increases as the sensor's resistance ( $R_s$ ) decreases, depending on gas concentration.

#### Basic Measuring Circuit:

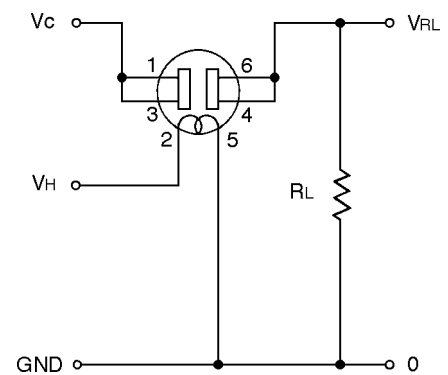

### Standard Circuit Conditions:

Item	Symbol	Rated Values	Remarks
Heater Voltage	$V_H$	5.0±0.2V	AC or DC
Circuit Voltage	$V_C$	Max. 24V	AC or DC *PS≤15mW
Load Resistance	$R_L$	Variable	*PS≤15mW

### Electrical Characteristics:

Item	Symbol	Condition	Specification
Sensor Resistance	$R_s$	R-22 at 1000ppm/air	1kΩ ~ 5kΩ
Change Ratio of Sensor Resistance	$R_s/R_o$	$\frac{R_s \text{ (R-22 at 3000ppm/air)}}{R_s \text{ (R-22 at 1000ppm/air)}}$	0.30 ± 0.10
Heater Resistance	$R_H$	Room temperature	30.0 ± 3.0Ω
Heater Power Consumption	$P_H$	$V_H=5.0V$	835 ± 90mW

### Standard Test Conditions:

TGS 830 complies with the above electrical characteristics when the sensor is tested in standard conditions as specified below:

Test Gas Conditions: 20°±2°C, 65±5%R.H.

Circuit Conditions:  $V_C = 10.0 \pm 0.1V$  (AC or DC),

$V_H = 5.0 \pm 0.05V$  (AC or DC),

$R_L = 10.0k\Omega \pm 1\%$

Preheating period before testing: More than 7 days

Sensor Resistance ( $R_s$ ) is calculated by the following formula:

$$R_s = \left( \frac{V_C}{V_{RL}} - 1 \right) \times R_L$$

Power dissipation across sensor electrodes ( $P_s$ ) is calculated by the following formula:

$$P_s = \frac{V_C^2 \times R_s}{(R_s + R_L)^2}$$

#### FIGARO USA, INC.

3703 West Lake Ave. Suite 203  
Glenview, Illinois 60025  
Phone: (847)-832-1701  
Fax: (847)-832-1705  
email: figarousa@figarosensor.com