

Product Name

HHC71F(JQX-62F)

□ Contact Ratings	□ Specification
□ Coil Ratings	□ Coil Versions
□ Dimension.Bottom View	□ Reference Data



[□ Contact Ratings](#)

[Top](#)

Contact Ratings	1Z、1H、1D	2Z、2H、2D
Contact Resistance	$\leq 50\text{m}\Omega$ (1A 24VDC)	
Contact material	Alloy with Silver	
Contact capacity	100A 250VAC/24VDC	80A 250VAC/24VDC

[□ Specification](#)

[Top](#)

Insulation Resistance	1000m Ω 500VDC	
Dielectric Strength	BCC	2500VAC/1 Min
	BOC	1500VAC/1 Min
Operate Time	Pick Up Time	$\leq 25\text{ms}$
	Release Time	$\leq 25\text{ms}$
Terminal Type	Flange	

[□ Coil Ratings](#)

[Top](#)

Nominal Coil power	2W、3.5VA
--------------------	----------

[□ Coil Versions](#)


[Top](#)

Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	Coil Resistance Ω : $\pm 10\%$
6	≤ 4.5	≥ 0.6	18
9	≤ 6.75	≥ 0.9	40.5
12	≤ 9	≥ 1.2	72
18	≤ 13.5	≥ 1.8	162
24	≤ 18	≥ 2.4	288
48	≤ 36	≥ 4.8	1152
60	≤ 45	≥ 6	1800
110	≤ 82.5	≥ 11	6050


Nominal Voltage VAC	Pull-in Voltage VAC	Release Voltage VAC	Coil Resistance Ω : $\pm 10\%$
6	≤ 4.8	≥ 1.8	3.6
9	≤ 7.2	≥ 2.7	8.1
12	≤ 9.6	≥ 3.6	14.4
18	≤ 14.4	≥ 5.4	32.4
24	≤ 19	≥ 7.2	57.6
48	≤ 38.4	≥ 14.4	230
60	≤ 48	≥ 18	360
110	≤ 88	≥ 33	1210
220	≤ 176	≥ 66	4840
380	≤ 304	≥ 114	14440

Dimension Bottom View

Top

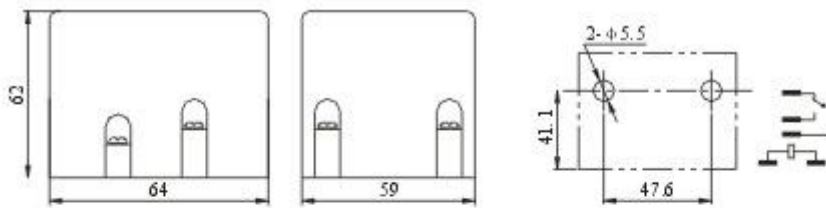

HHC71F-1Z(JQX-62F-1Z)

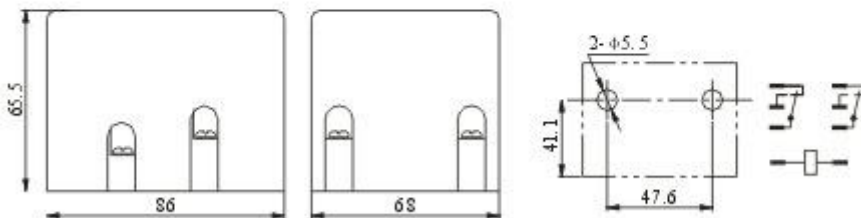

HHC71F-2Z(JQX-62F-2Z)

Reference Data

Top

