


KW4A[a][h]-6[c]-t-f

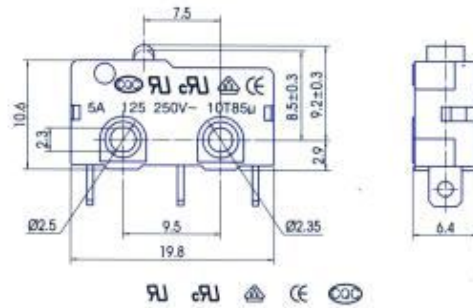

a Contact rating

code	Contact rating
NII	1A 125VAC
05	5A 125VAC - UL, cUL 5A 250VAC - VDE, CE, CQC
10	10A 250VAC

h Housing material

code	Housing material
	Thermoplastic
NII	
	Thermosetting plastic
F	

c Contact arrangement

code	Contact arrangement
	SPDT (on-on)
NII	
	SPST-normal close (momentary off)
C	
	SPST-normal open (momentary on)
O	

f Operating force by no lever

code	Operating force by no lever
NII	145±25 gf
X	50gf min. ~ 250gf max.

l Lever type

code	Lever type
	No lever
0000	
	Straight lever
D165	 Standard L=16.5mm Other L=13mm, 20mm, 25mm, 38mm, and so on are available.
	Simulated lever
S	
	Roller lever
R	

Remarks

The shape of lever might vary depends on the customer's requirement.

t Terminal type

code	Terminal type
	Solder terminal
NII	
	PCB terminal
P	
	Quick connect terminal (#110)
T	
	Left side PCB terminal
LP	