

VISION 2000®

Flow sensor

The liquid turbine meters of the series **VISION 2000®** are for the exact measuring of small quantities of liquids. The actual flow as well as the already passed flow can be measured.



Principle:

Flow causes the bladed rotor of the **VISION 2000®** to turn at an angular velocity directly proportional to the velocity of the fluid measured. As the blades pass beneath a magnetic pickup coil, a frequency signal is generated. Each pulse is equivalent to a discrete volume of fluid. The frequency pulse is directly proportional to the rotor angular velocity and the flow rate.

The waves are readily transmitted to local or remote electrical instrumentation.

Advantages:

The large number of pulses gives a good resolution. As the mass of the turbine are very small the response time is very short. It is not necessary to install a straight length of pipeline at the upstream side.

The simple mechanical construction of the sensor **VISION 2000®** guarantees a long lifespan without any loss of accuracy.

Pressure pulses do not affect the measuring system.

Features:

- low cost
- 6 flow ranges from 0,25 l/min to 35 l/min in the same body
- simple construction
- length 55 mm, weight 15 gr
- high repeatability
- digital output
- temperature range -20 to + 100°C
- operating pressure 25 bar

model number	flow range l/min	pulses/l	frequency/Hz	DN	air split/mm
46500-164-4F16,5	2 - 35	700	23 - 408	8	0,4
46500-164-4F23	1,5 - 25	1000	25 - 416	8	0,4
46500-164-4F44	1 - 15	2200	37 - 550	8	0,15
46510-164-4F44	1 - 10	3300	55 - 550	6	0,15
46500-164-2F66	0,5 - 7,5	4600	38 - 575	8	0,15
46510-164-2F66	0,5 - 5	6900	58 - 575	6	0,15

Specifications:

flow rates	see selection table	
flow medium	liquids without particles, we recommend filtration with approx. 20 to 40 micros	
pressure rating	25 bar (200 bar bursting pressure)	
end connection	G 3/8" or NPT 3/8"	
temperature range	- 20 - + 100°C	
accuracy	+/- 3% of reading	
repeatability	better than 0,5 %	
viscosity	up to approx. 15cSt	
pressure drop	refer to table on page 3	
el. connection	AMP Faston 2,8/6,3 mm x 0,8 mm or 1m cable 3xAWG 24 with free cable end or connector bases with 3 flat connectors 2,8 x 0,5 fitted for electrical connector EN 60529	
power supply	5 – 24 VDC	
power consumption	approx. 8mA	
output signal	frequency open collector (NPN sinking)	
output current	max. 20mA	
materials	body	Grilamid TR55 (PA12)
	turbine	PA12 Ferrit
	bearings	PTFE / Graphite
approval	all parts that are touching the medium possess the approval for cold- and warm water	
dimensions of sealing	inside Ø 8,5 mm, outside Ø 14,5 mm thickness 2 mm, hardness approx. 70Sh A	

For orders over 10'000 pieces we can respond to customers wishes regarding the connection of the medium and the electrical connections.


PRESSURE DROP

	46500-164- 4F16,5	46500-164- 4F22/4F23	46500-164- 4F44	46510-164- 4F44	46500-164- 2F66	46510-164- 2F66
1 l/min	≈0	≈0	≈0	≈0	≈0	≈0
2 l/min	≈0	≈0	≈0	0,05	≈0	0,06
5 l/min	≈0	0,05	0,05	0,2	0,12	0,2
10 l/min	0,15	0,17	0,2	0,4	0,4	0,7
15 l/min	0,25	0,27	0,4			
20 l/min	0,45	0,48				
25 l/min	0,60	0,65				
30 l/min	0,92					

(ΔP bar H₂O 20°C)


Δp
(bar)

46500-164-4F16,5

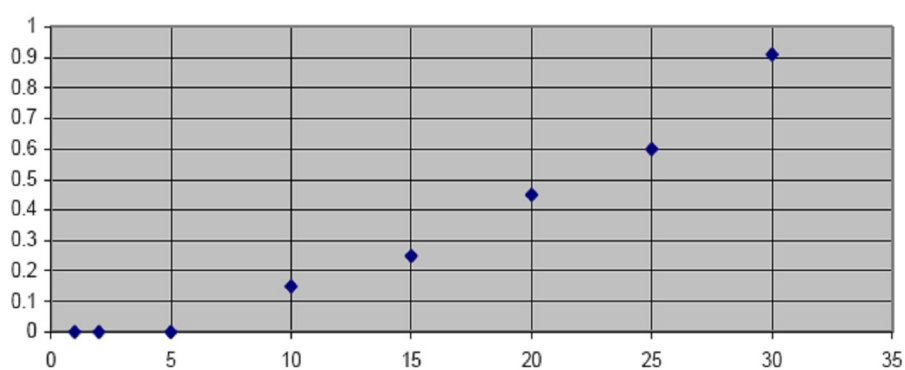

(Q l/min)

Dimensions

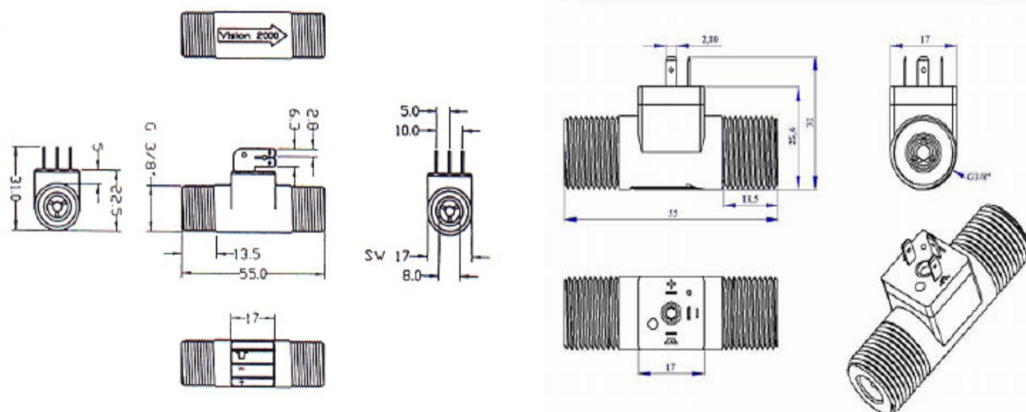

Dimensions in mm